


## 2P-1012-DDWS\*

- Lift capacity: @ 250 psi 43,000 lbs., 18,000 front & 25,000 rear
- Lift capacity: @ 350 psi 60,000 lbs., 25,000 front & 35,000 rear
- Single moveable front and single stationary rear
- Axle engaging front saddle and adapters and dual dish rear wheel support.
- Adjustable front cylinder for various wheelbase lengths
- Electric/hydraulic oil or Citgo "Aquamarine" oil operated
- Post diameters: 10-5/8" front & 12-5/8" rear
- Displacement: 63 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

\* Requires a power unit  
see page 50 for details

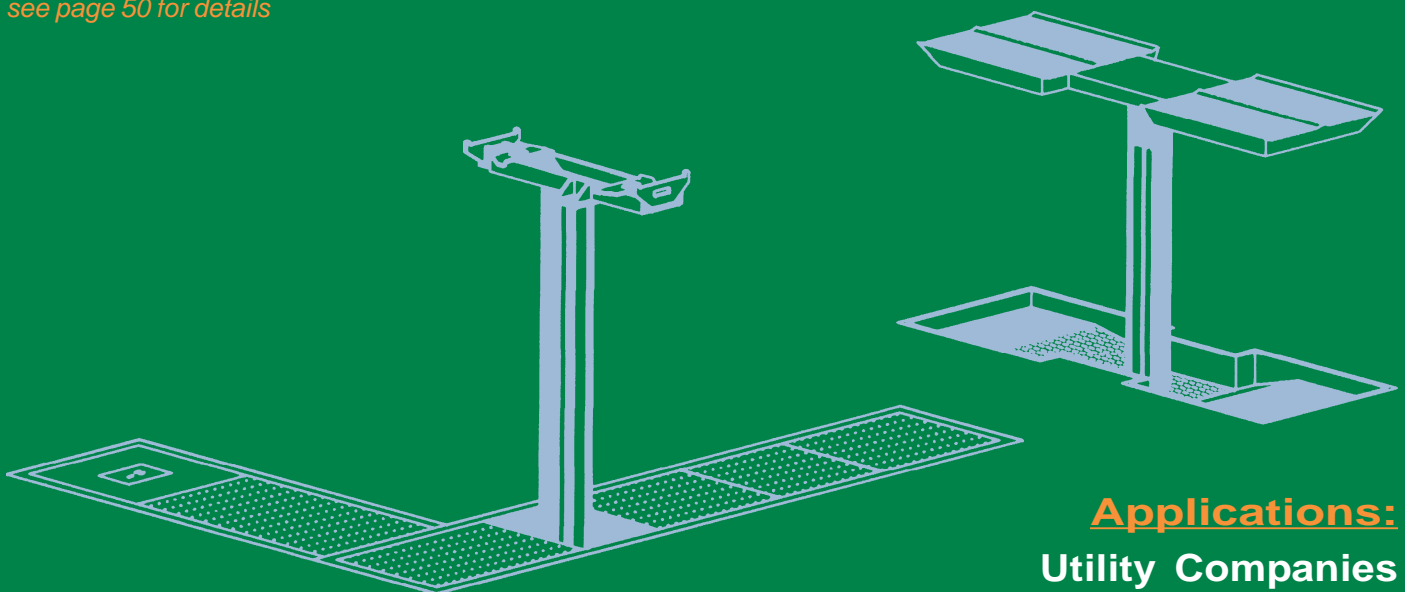

### Applications:

Utility Companies  
Transit Authorities  
Municipal Garages

or wherever heavy-duty vehicle lifting is required

Power Post Lifting Systems

fastest, most  
reliable and  
economical method  
for lifting



standards & options next page

# Proven Lifting Technology

## Specifications and Options

### **2P-1012-DDWS Standard Equipment:**

12 foot front frame (non-recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, (note: power unit is not supplied) and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and rear is fixed dual dish wheel support 11" wide.



### **Your Easy Upgrade Options:**

#### **Front Frame Upgrades:**

Additional front frame length for accommodating longer vehicle wheelbase lengths.

SVI Upgrade Number	Description	SVI Upgrade Number	Description
SV-9667-013-L	13' Front Frame	SV-9667-017-L	17' Front Frame
SV-9667-014-L	14' Front Frame	SV-9667-018-L	18' Front Frame
SV-9667-015-L	15' Front Frame		
SV-9667-016-L	16' Front Frame	Longer front frame lengths available per request	

#### **Air Lock Upgrade:**

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. **To upgrade order SV-56F/06C-L**

#### **Power Spot Upgrade:**

Converts adjustment of front cylinder position from a manual ratchet system to an easy to operate hydraulic drive system. This means easy work for the lift operator when changing the lift to accommodate different wheelbase vehicles. **To upgrade order SV-32-L**

#### **Fiberglass Upgrade:**

Fiberglass coat your cylinder components for added protection.

SVI Upgrade Number	Description
SV-9667-32FFG-L	Add Fiberglass Coating to the Front Cylinder Assembly
SV-9673-012DFG-L	Add Fiberglass Coating to the Rear Cylinder Assembly

