


2P-105-RF

- Lifting capacity: 24,000 lbs., 12,000 front & 12,000 rear
- Single moveable recessed front and single stationary rear
- Axle engaging
- Adjustable front cylinder for various wheelbase lengths
- Air/hydraulic oil or Citgo "Aquamarine" oil operated
- Post diameters: 10-5/8" front & rear
- Displacement: 50 gallons
- Raised vehicle contact height above floor: 67" front & 69-3/4" rear based on standard adapters
- Multiple lip seal seal design for increased performance

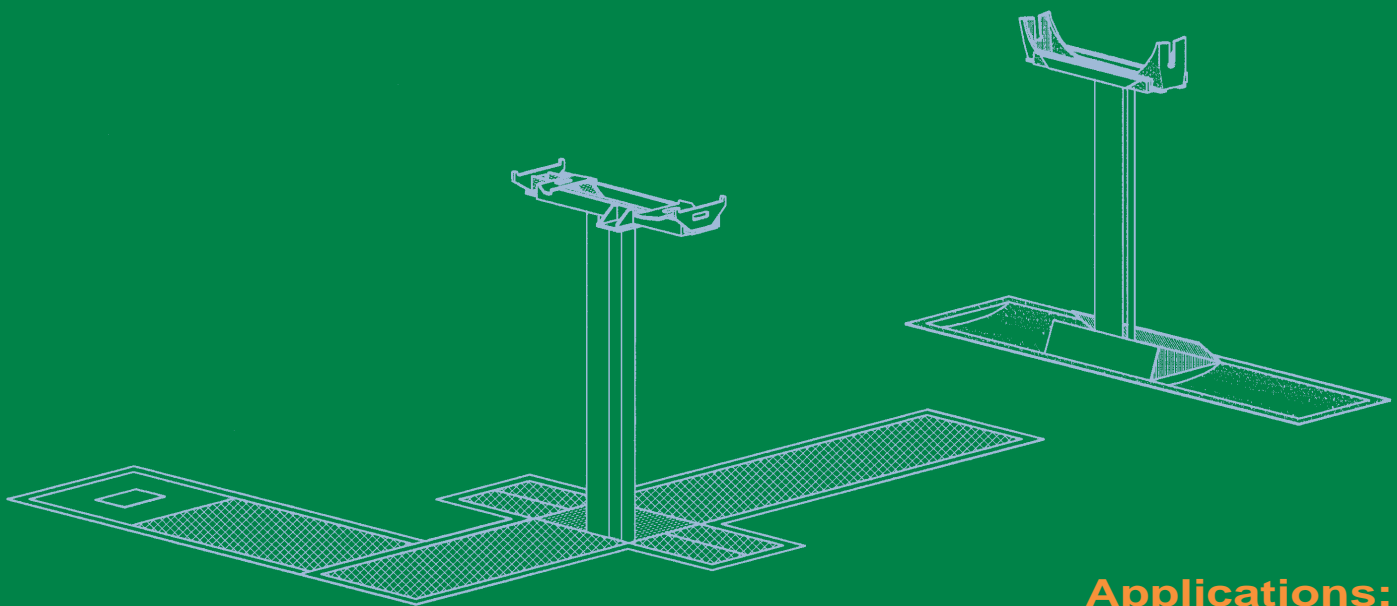

Applications:

Truck Dealerships

School Buses

Municipal Garages

or wherever heavy-duty vehicle lifting is required

Power Post Lifting Systems

fastest, most
reliable and
economical method
for lifting



standards & options next page

Proven Lifting Technology

Specifications and Options

2P-105-RF Standard Equipment:

12 foot front frame (recessed), manual waist height release automatic lift locks, manual ratchet drive front post adjustment, quick adapter spotting devices, floor level dead-man style control valves, standard bottom pipe tank with low oil lock and non-fiberglass components. Standard front adapters adjust from 40-1/2" to 57-1/2" in width and standard rear adapters are adjustable from 24" to 49".

Your Easy Upgrade Options:

Front Frame Upgrades:

Additional front frame length for accommodating longer vehicle wheelbase lengths.

| SVI Upgrade Number | Description | SVI Upgrade Number | Description |
|--------------------|-----------------|--|-----------------|
| SV-9667-013-LR | 13' Front Frame | SV-9667-017-LR | 17' Front Frame |
| SV-9667-014-LR | 14' Front Frame | SV-9667-018-LR | 18' Front Frame |
| SV-9667-015-LR | 15' Front Frame | | |
| SV-9667-016-LR | 16' Front Frame | Longer front frame lengths available per request | |

Air Lock Upgrade:

Converts standard manual release locks to an air operated remote release multi-position lock assembly. This means your lift will lock in positions throughout the stroke rather than just at full stroke as with manual style locks. **To upgrade order SV-56-L**

Power Spot Upgrade:

Not available on this model.

Tank Upgrade:

Your choice of three upgrades. Add fiberglass coating or go to a top pipe style tank. Fiberglass coating protects your component from corrosion. Top pipe style tanks give installers easy access to fittings and helps periodic inspection.

| SVI Upgrade Number | Description |
|--------------------|--|
| SV-9804-1-L | Add Fiberglass Coating to the Standard Tank |
| SV-9804-2-L | Change the Standard Tank to a Top Pipe Tank |
| SV-9804-3-L | Add Fiberglass Coating and Change the Standard Tank to a Top Pipe Tank |

Fiberglass Upgrade:

Fiberglass coat your cylinder components for added protection.

| SVI Upgrade Number | Description |
|--------------------|---|
| SV-9667-32FFG-L | Add Fiberglass Coating to the Front Cylinder Assembly |
| SV-9667-32FG-L | Add Fiberglass Coating to the Rear Cylinder Assembly |

